PORT • A • COOL CYCLONE

portable evaporative cooling units

QUICK SETUP SHEET

1

IF USING INDOORS

- Place back of unit near a slightly opened window or door.
- A window or door on the opposite side of the room should be left slightly open.

CAUTION: Do not run pump when water tank is dry.

2

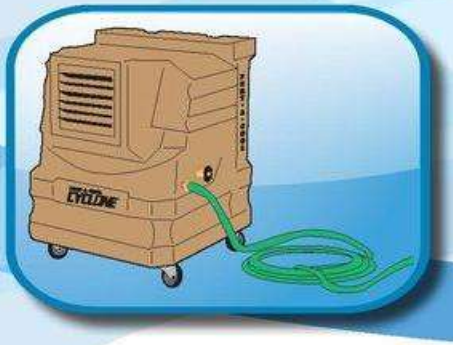

FILL WITH WATER

- Connect with standard garden hose or fill manually
- Once the tank is filled, the water hose can be disconnected.

Scan the QR code for more information.

3

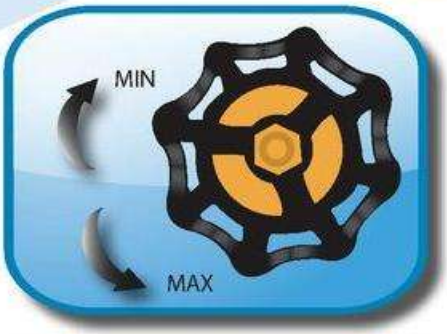

Initially, there may be some odor emitted from the pads. This disappates after 1-3 weeks of use.

The water flow valve on each unit is set at max flow. Adjust as needed before use.

ADJUSTING WATER FLOW FOR OPTIMAL COOLING

- Turn pump on so water is flowing over pads
- Turn fan on and run for 5 minutes
- Adjust water flow to achieve narrow dry streaks on pads
- Turn water valve to the right if no dry streaks are present
- Turn water valve to the left if large areas of dry pad are present
- Allow 5 minutes between adjustments

For more information, please see the owner's manual included with your Port-A-Cool® unit
Call (936) 568-5651 or visit www.port-a-cool.com/cycloneproducts.html